

ALTO LINE

10 JAAR GARANTIE

Afgifteoverzicht

Henrad NV: PLO9/0002/E002

EN442 75/65/20°C

EN442 70/50/20°C

EN442 55/45/20°C

Hoogte	1600				1800				2000				2200				Hoogte	
	Type	Type 11	Type 20	Type 21	Type 22	Type 11	Type 20	Type 21	Type 22	Type 11	Type 20	Type 21	Type 22	Type 11	Type 20	Type 21		Type 22
300		588 W		842 W	1.026 W	640 W		918 W	1.107 W	689 W		981 W	1.188 W	736 W		1.053 W	1.269 W	300
		439 W		629 W	764 W	479 W		686 W	824 W	516 W		734 W	883 W	552 W		788 W	943 W	
		302 W		432 W	522 W	329 W		472 W	563 W	355 W		505 W	603 W	380 W		543 W	643 W	
400		784 W		1.123 W	1.368 W	853 W		1.224 W	1.476 W	919 W		1.308 W	1.584 W	982 W		1.404 W	1.692 W	400
		586 W		839 W	1.018 W	638 W		915 W	1.098 W	688 W		979 W	1.178 W	736 W		1.051 W	1.257 W	
		403 W		576 W	696 W	439 W		629 W	750 W	474 W		673 W	804 W	507 W		724 W	858 W	
500		980 W		1.404 W	1.710 W	1.067 W		1.530 W	1.845 W	1.149 W		1.635 W	1.980 W	1.227 W		1.755 W	2.115 W	500
		732 W		1.049 W	1.273 W	797 W		1.144 W	1.373 W	860 W		1.223 W	1.472 W	920 W		1.314 W	1.572 W	
		503 W		720 W	870 W	548 W		786 W	938 W	592 W		841 W	1.005 W	634 W		905 W	1.072 W	
600		1.175 W		1.685 W	2.052 W	1.280 W		1.836 W	2.214 W	1.379 W		1.962 W	2.376 W	1.472 W		2.106 W	2.538 W	600
		878 W		1.259 W	1.528 W	957 W		1.372 W	1.647 W	1.032 W		1.468 W	1.767 W	1.103 W		1.577 W	1.886 W	
		603 W		864 W	1.044 W	659 W		943 W	1.125 W	711 W		1.010 W	1.206 W	761 W		1.086 W	1.286 W	
700		1.371 W		1.966 W	2.394 W	1.493 W		2.142 W	2.583 W	1.609 W		2.289 W	2.772 W	1.718 W		2.457 W	2.961 W	700
		1.025 W		1.468 W	1.782 W	1.117 W		1.601 W	1.922 W	1.205 W		1.712 W	2.061 W	1.287 W		1.839 W	2.200 W	
		704 W		1.008 W	1.218 W	768 W		1.100 W	1.313 W	830 W		1.178 W	1.407 W	888 W		1.267 W	1.501 W	

ALTO PLAN

10 JAAR GARANTIE


Henrad NV: PLO9/0002/E002

Hoogte	1600				1800				2000				2200				Hoogte	
	Type	Type 11	Type 20	Type 21	Type 22	Type 11	Type 20	Type 21	Type 22	Type 11	Type 20	Type 21	Type 22	Type 11	Type 20	Type 21		Type 22
300		588 W	693 W	842 W	1.026 W	640 W	760 W	918 W	1.107 W	689 W	824 W	981 W	1.188 W	736 W	887 W	1.053 W	1.269 W	300
		439 W	522 W	629 W	764 W	479 W	572 W	686 W	824 W	516 W	620 W	734 W	883 W	552 W	668 W	788 W	943 W	
		302 W	362 W	432 W	522 W	329 W	397 W	472 W	563 W	355 W	430 W	505 W	603 W	380 W	463 W	543 W	643 W	
400		784 W	924 W	1.123 W	1.368 W	853 W	1.013 W	1.224 W	1.476 W	919 W	1.099 W	1.308 W	1.584 W	982 W	1.183 W	1.404 W	1.692 W	400
		586 W	696 W	839 W	1.018 W	638 W	763 W	915 W	1.098 W	688 W	827 W	979 W	1.178 W	736 W	891 W	1.051 W	1.257 W	
		403 W	483 W	576 W	696 W	439 W	529 W	629 W	750 W	474 W	574 W	673 W	804 W	507 W	618 W	724 W	858 W	
500		980 W	1.155 W	1.404 W	1.710 W	1.067 W	1.266 W	1.530 W	1.845 W	1.149 W	1.374 W	1.635 W	1.980 W	1.227 W	1.479 W	1.755 W	2.115 W	500
		732 W	870 W	1.049 W	1.273 W	797 W	953 W	1.144 W	1.373 W	860 W	1.034 W	1.223 W	1.472 W	920 W	1.113 W	1.314 W	1.572 W	
		503 W	604 W	720 W	870 W	548 W	661 W	786 W	938 W	592 W	717 W	841 W	1.005 W	634 W	772 W	905 W	1.072 W	
600		1.175 W	1.386 W	1.685 W	2.052 W	1.280 W	1.519 W	1.836 W	2.214 W	1.379 W	1.649 W	1.962 W	2.376 W	1.472 W	1.775 W	2.106 W	2.538 W	600
		878 W	1.044 W	1.259 W	1.528 W	957 W	1.144 W	1.372 W	1.647 W	1.032 W	1.242 W	1.468 W	1.767 W	1.103 W	1.336 W	1.577 W	1.886 W	
		603 W	724 W	864 W	1.044 W	659 W	793 W	943 W	1.125 W	711 W	861 W	1.010 W	1.206 W	761 W	927 W	1.086 W	1.286 W	
700		1.371 W	1.617 W	1.966 W	2.394 W	1.493 W	1.772 W	2.142 W	2.583 W	1.609 W	1.924 W	2.289 W	2.772 W	1.718 W	2.071 W	2.457 W	2.961 W	700
		1.025 W	1.218 W	1.468 W	1.782 W	1.117 W	1.334 W	1.601 W	1.922 W	1.205 W	1.449 W	1.712 W	2.061 W	1.287 W	1.559 W	1.839 W	2.200 W	
		704 W	845 W	1.008 W	1.218 W	768 W	926 W	1.100 W	1.313 W	830 W	1.005 W	1.178 W	1.407 W	888 W	1.081 W	1.267 W	1.501 W	


AANSLUITMOGELIJKHEDEN

ALTO PLAN ALTO LINE

T11/20/21/22

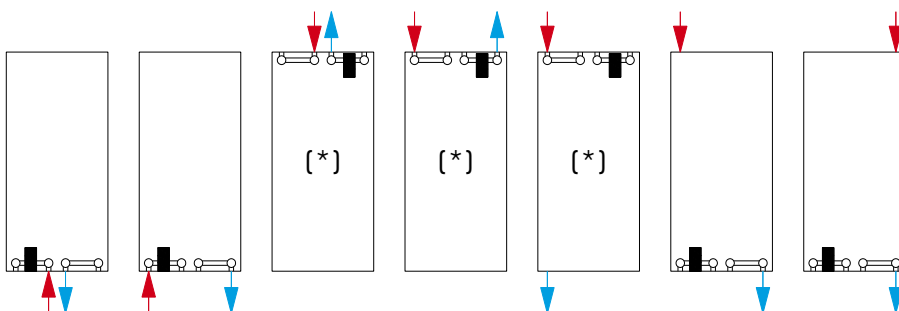

(*) Bij de montage met de middenaansluiting bovenaan moet de radiator ontluicht kunnen worden aan beide bovenste hoekaansluitingen.

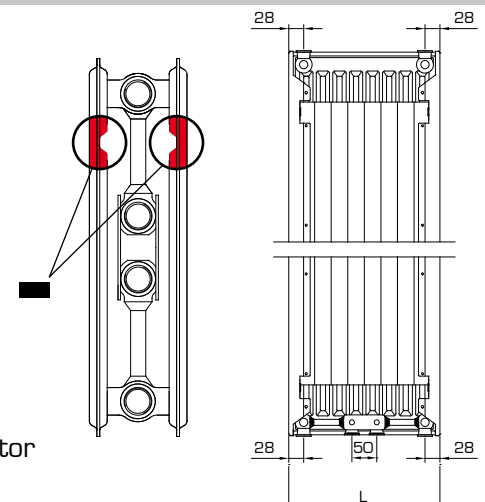

Levertermijnen afhankelijk van het model: raadpleeg uw groothandel.